123 River Street

Exampleville, Ohio 43702

Owner Example, Pat
NFIP Community 399990 Exampleville, City of
Date of Assessment 09/21/2026

Percent Damaged
75.0%
Substantially Damaged

Basis for Value of Structure
$129,189.26
Computed Actual Cash Value

Basis for Cost of Repairs
$96,900.46
Computed Damages

Subdivision

Subdivision	Riverside Addition
Parcel #	092-0004-0118-00
Lot #	18
Elev. of Lowest Floor	486.5 ft.
Datum	NAVD 88

Community

NFIP Community Name	Exampleville, City of
Latitude	39.098712
Longitude	-84.507634


Structure Address

Owner's Name	Example, Pat
Street Address	123 River Street
City	Exampleville
County/Parish	Union
State	Ohio
Zip	43702
Phone	(555) 555-0142


Mailing Address

Owner's Name	Example, Pat
Street Address	77 Hill Street
City	Exampleville
County/Parish	Union
State	Ohio
Zip	43706-1234
Phone	
Care Of	c/o J. Example

Photos

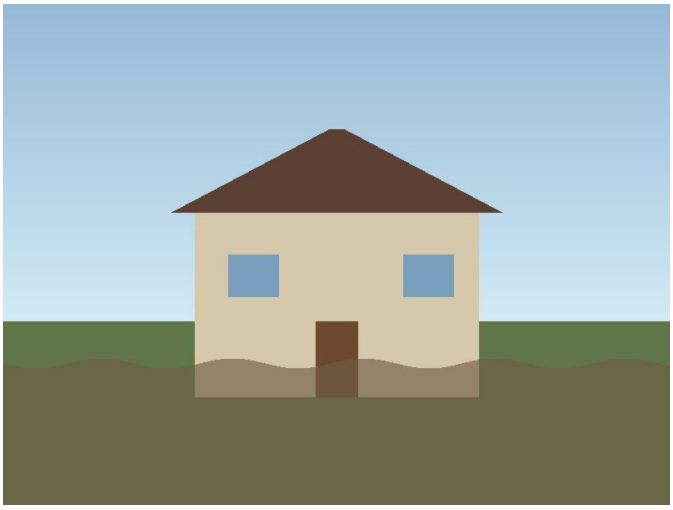

(Default Image)

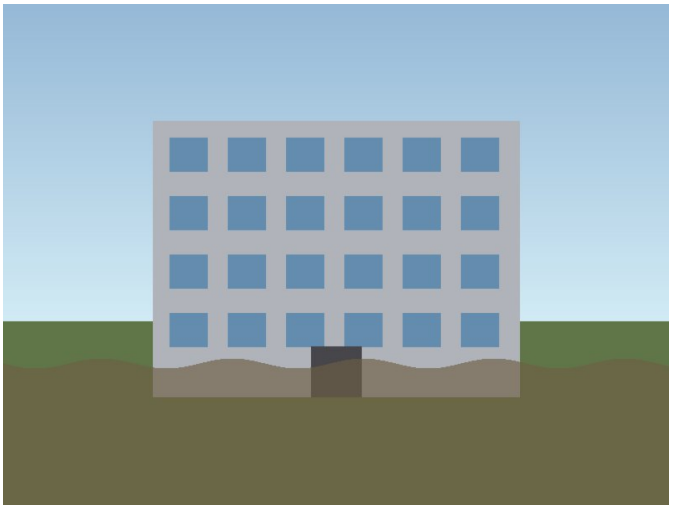

(Additional Image)

Structure/Damage/NFIP Information

Year of Construction	1962	Cause of Damage	Flood
Date of Damage	09/14/2026	Duration of Flood	2 Days
Residence Type	Single Family Residence	Structure Type	Residential
Foundation	Crawlspace	Exterior Finish	Siding or Stucco (Standard)
Superstructure	Stud-framed (Standard)	HVAC	Heating and/or Cooling
Roofing	Shingles - Asphalt, Wood (Standard)	Story	One Story (Standard)
Quality	Good	Flood Elevation	490.75
Date of Assessment	09/21/2026	Est. Depth of Flood Above Lowest Floor	4.25
Inspector Name	Inspector A	NFIP Community ID	399990
Inspector Phone	(555) 555-0100		
Residence Information	Brick ranch, attached one-car garage.		

NFIP Information

Firm Panel #	Suffix	Date of FIRM Panel	Firm Zone	BFE	Regulatory Floodway
39061C0232	E	09/17/2010	AE	489.25	No

Community Specific Information: Permit office: 805 Central Ave, Suite 500.

Custom Fields

Custom Field Name	Custom Field Value
Custom Field 1	Block 12 sweep
Custom Field 2	
Custom Field 3	

Square Footage

Total Sq. Ft.	Geographic Adjustment	Base Cost Per Sq. Ft.
1,450	0.93	$118.75

Cost Adjustments

Adjustments	Quantity	Unit	Unit Cost	Adjustment Cost
Roofing		Sq Ft		$0.00
Heating / Cooling		Ea		$0.00
Appliances		Ea		$0.00
Fireplaces		Ea		$0.00
Porch / Breezeways		Sq Ft		$0.00
Garage	240	Sq Ft	$32.50	$7,800.00

Additional Adjustments

Adjustments	Quantity	Unit Cost	Adjustment Cost
Shed	1	$2,500.00	$2,500.00
		Total Adjustments *	**$10,300.00**
		Total Replacement Cost	**$170,434.38**
		Replacement Cost Per Square Foot	**$117.54**

* Total Adjustment calculation includes the Geographical Adjustment.

Computed Actual Cash Value

Cost Data Reference	RSMeans 2026	Cost Data Date	01/01/2026
Depreciation Determination	4 - Average Condition	Depreciation Percentage	24.20%
Computed Actual Cash Value	$129,189.26		
Other Depreciation Explanation			

Element Percentages

Element	Percent Damaged	Element Percentage	Element Cost	Damage Values
Foundation	10.0%	9.0%	$15,339.09	$1,533.91
Superstructure	20.0%	16.4%	$27,951.24	$5,590.25
Roof Covering	0.0%	4.3%	$7,328.68	$0.00
Exterior Finish	35.0%	6.9%	$11,759.97	$4,115.99
Interior Finish	90.0%	13.0%	$22,156.47	$19,940.82
Doors and Windows	60.0%	15.5%	$26,417.33	$15,850.40
Cabinets and Countertops	100.0%	4.4%	$7,499.11	$7,499.11
Floor Finish	100.0%	7.7%	$13,123.45	$13,123.45
Plumbing	50.0%	8.4%	$14,316.49	$7,158.24
Electrical	70.0%	4.8%	$8,180.85	$5,726.60
Appliances	100.0%	4.1%	$6,987.81	$6,987.81
HVAC	100.0%	5.5%	$9,373.89	$9,373.89
		100%	Total Replacement Cost	Total Estimated Damages
			$170,434.38	**$96,900.46**

Percent Damaged

Basis for Value of Structure	Percent Damaged	Basis for Cost of Repairs
Computed Actual Cash Value	**75.0%** **Substantially Damaged**	Computed Damages

Damage Summary

Replacement Cost	$170,434.38	Total Estimated Damages	$96,900.46
Depreciation Percentage	24.20%	Percent of Existing Improvements and Repairs Pre-Disaster	
Computed Actual Cash Value*	$129,189.26	Repair/Reconstruction Percentage	75.0%

* Per FEMA Publication 213, Actual Cash Value may be used as Market Value.

Optional User Entered Data

Professional Market Appraisal	Contractor Estimate
Tax Assessed Value	Community Estimate
Factor Adjustment	
Adjusted Tax Assessed Value	

Authorized Local Official : _____ _____
Signature (Date)

Authorized Local Official : _____ _____
Print Name (Date)

400 Front Street

Exampleville, Ohio 43702-1234

Owner Riverside Holdings LLC
NFIP Community 399990 Exampleville, City of
Date of Assessment 09/22/2026

Percent Damaged
51.6%
Substantially Damaged

Basis for Value of Structure
$1,271,911.80
Computed Actual Cash Value

Basis for Cost of Repairs
$656,876.72
Computed Damages

Subdivision

Subdivision	
Parcel #	
Lot #	
Elev. of Lowest Floor	
Datum	

Community

NFIP Community Name	Exampleville, City of
Latitude	
Longitude	


Structure Address

Owner's Name	Riverside Holdings LLC
Street Address	400 Front Street
City	Exampleville
County/Parish	Union
State	Ohio
Zip	43702-1234
Phone	

Mailing Address

Owner's Name	
Street Address	
City	
County/Parish	
State	
Zip	
Phone	
Care Of	

Photos

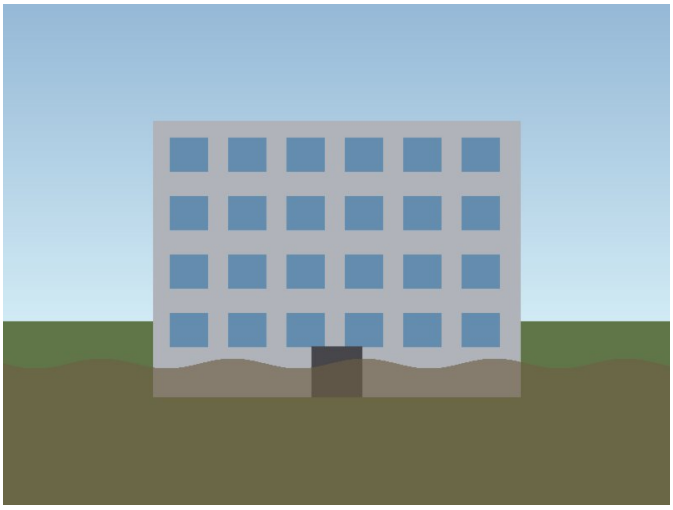

(Default Image)

No Photo Available

(Additional Image)

Structure/Damage/NFIP Information

Year of Construction	1978	Cause of Damage	Flood
Date of Damage	09/14/2026	Duration of Flood	3 Days
Number Of Stories	2 thru 4	Structure Use	Office Building
Sprinkler	Yes	Structure Type	Non-Residential
Conveyance	No	Flood Elevation	
Quality	Good	Est. Depth of Flood Above Lowest Floor	2.50
Date of Assessment	09/22/2026	NFIP Community ID	399990
Inspector Name	R. Inspector		
Inspector Phone			
Structure Information	Three-story steel frame office.		

NFIP Information

Firm Panel #	Suffix	Date of FIRM Panel	Firm Zone	BFE	Regulatory Floodway

Community Specific Information

Custom Fields

Custom Field Name	Custom Field Value
Custom Field 1	
Custom Field 2	
Custom Field 3	

Square Footage

Total Sq. Ft.	Geographic Adjustment	Base Cost Per Sq. Ft.
12,000	0.93	$165.00

Cost Adjustments

Adjustments	Quantity	Unit	Unit Cost	Adjustment Cost
Built-In Equipment	2	Ea	$5,000.00	$10,000.00
Built-In Security/Communications		Ea		$0.00
Conveyance System		Ea		$0.00
Wall Covering		Sq Ft		$0.00
Windows/Skylights		Ea		$0.00
Roofing		Sq Ft		$0.00

Additional Adjustments

Adjustments	Quantity	Unit Cost	Adjustment Cost
None			

Total Adjustments *	**$10,000.00**
Total Replacement Cost	**$1,851,400.00**
Replacement Cost Per Square Foot	**$154.28**

* Total Adjustment calculation includes the Geographical Adjustment.

Computed Actual Cash Value

Cost Data Reference		Cost Data Date	10/20/2026
Depreciation Determination	3 - Requires Some Repairs	Depreciation Percentage	31.30%
Computed Actual Cash Value	$1,271,911.80		
Other Depreciation Explanation			

Element Percentages

Element	Percent Damaged	Element Percentage	Element Cost	Damage Values
Foundation	5.0%	3.7%	$68,501.80	$3,425.09
Superstructure	10.0%	30.8%	$570,231.20	$57,023.12
Roof Covering	0.0%	1.9%	$35,176.60	$0.00
Plumbing	40.0%	4.7%	$87,015.80	$34,806.32
Electrical	45.0%	26.2%	$485,066.80	$218,280.06
HVAC	60.0%	11.2%	$207,356.80	$124,414.08
Interiors	55.0%	21.5%	$398,051.00	$218,928.05
		100%	Total Replacement Cost	Total Estimated Damages
			$1,851,400.00	**$656,876.72**

Percent Damaged

Basis for Value of Structure	Percent Damaged	Basis for Cost of Repairs
Computed Actual Cash Value	**51.6%** **Substantially Damaged**	Computed Damages

Damage Summary

Replacement Cost	$1,851,400.00	Total Estimated Damages	$656,876.72
Depreciation Percentage	31.30%	Percent of Existing Improvements and Repairs Pre-Disaster	
Computed Actual Cash Value*	$1,271,911.80	Repair/Reconstruction Percentage	51.6%

* Per FEMA Publication 213, Actual Cash Value may be used as Market Value.

Optional User Entered Data

Professional Market Appraisal	Contractor Estimate
Tax Assessed Value	Community Estimate
Factor Adjustment	
Adjusted Tax Assessed Value	

Authorized Local Official :

Signature (Date)

Authorized Local Official :

Print Name (Date)